

## MORE TERRA

design by Moreno De Giorgio

### Descrizione

- APPARECCHIO DI ILLUMINAZIONE DA TERRA
- CORPO ILLUMINANTE E ASTA: ALLUMINIO
- BASE: METALLO
- DIFFUSORE INFERIORE: METACRILATO MICROPRISMATICO AD ALTA EFFICIENZA
- DIFFUSORE SUPERIORE: METACRILATO OPALE
- SORGENTE: LED

### Finiture

- VERNICIATO GOFFRATO BIANCO RAL 9016

### Voltaggio e comando

- 110-240V 50-60Hz SENSORE "TOUCH DIMMER" 0-100% CON ACCENSIONE SEPARATA
- SPINA: BIPOLARE – TIPO C

### Opzioni

- 3 VERSIONI SECONDO IL FLUSSO LUMINOSO EMESSO  
MORE 8 - 8000lm (4000lm diretti e 4000lm indiretti) = 64W  
MORE 12 - 12000lm (4000lm diretti e 8000lm indiretti) = 94W  
MORE 16 - 16000lm (4000lm diretti e 12000lm indiretti) = 124W
- SU RICHIESTA:  
SPINA UK  
SPINA USA

### Sorgente

- LED 3000K CRI90 (4000K OPZIONALI)
- UGR <19


### Imballo

- CORPO ILLUMINANTE  
DIMENSIONI: 330x820x150mm  
PESO NETTO E LORDO: 1,5kg-2,5kg
- ASTA  
DIMENSIONI: 2100x90x90mm  
PESO NETTO E LORDO: 4,6kg-5,13kg
- BASE  
DIMENSIONI: 80x490x500mm  
PESO NETTO E LORDO: 8kg-9kg


### Certificazioni

CE  IP20

### Immagine



### Dimensioni

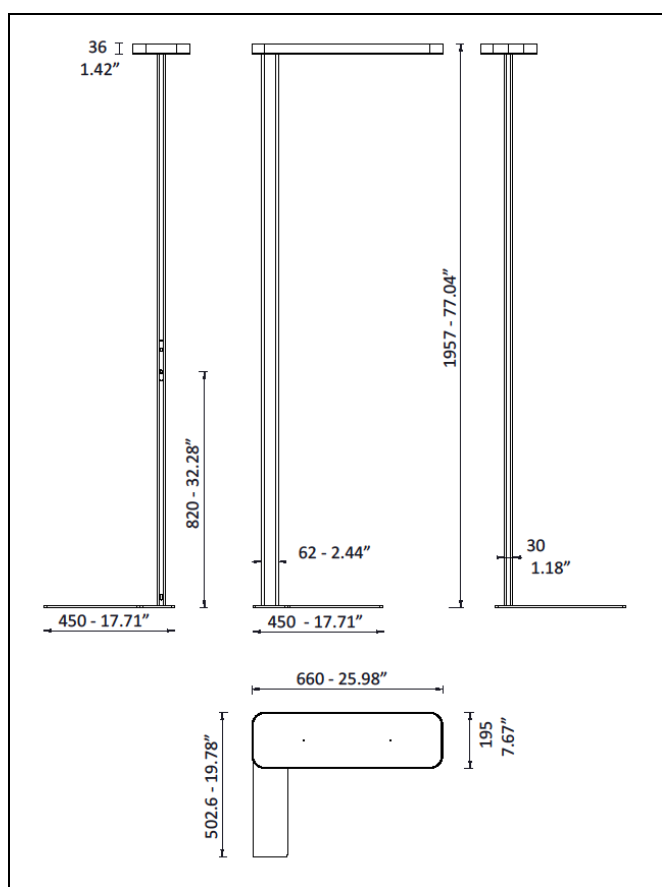

### Emissione luminosa

MORE 8 8000lm	MORE 12 12000lm	MORE 16 16000lm
50% DIRETTA	33% DIRETTA	25% DIRETTA
50% INDIRETTA	67% INDIRETTA	75% INDIRETTA

Dovuto alla nostra politica di continuo miglioramento, ci riserviamo il diritto di apportare delle modifiche a dettagli e specifiche in qualsiasi momento.

## MORE FLOOR

design by Moreno De Giorgio

### Description

- FLOOR LAMP
- ALUMINIUM LUMINAIRE AND STEM
- METAL BASE
- LOWER DIFFUSER: HIGH EFFICIENCY PRISMATIC METHACRYLATE
- UPPER DIFFUSER: OPAL METHACRYLATE
- LIGHT SOURCE: LED

### Finishing

- TEXTURED PAINTED WHITE RAL 9016

### Voltage - Control

- 110-240V 50-60Hz "TOUCH DIMMER" SENSOR 0-100% WITH SEPARATED CONTROL (UPPER AND LOWER LIGHT)
- PLUG: EUROPLUG – TYPE C

### Options

- 3 VERSIONS WITH SEVERAL LUMINOUS FLUX  
MORE 8 - 8000lm (4000lm direct - 4000lm indirect) = 64W  
MORE 12 - 12000lm (4000lm direct - 8000lm indirect) = 94W  
MORE 16 - 16000lm (4000lm direct - 12000lm indirect) = 124W
- ON DEMAND:  
UK PLUG  
USA PLUG

### Light Source

- LED 3000K CRI90 (4000K ON DEMAND)
- UGR <19


### Packaging

- LUMINAIRE  
SIZE: 330x820x150mm  
NET AND GROSS WEIGHT: 1,5kg - 2,5kg
- STEM  
SIZE: 2100x90x90mm  
NET AND GROSS WEIGHT: 4,6kg-5,13kg
- BASE  
SIZE: 80x490x500mm  
NET AND GROSS WEIGHT: 8kg-9kg


### Certifications



### Image



### Size

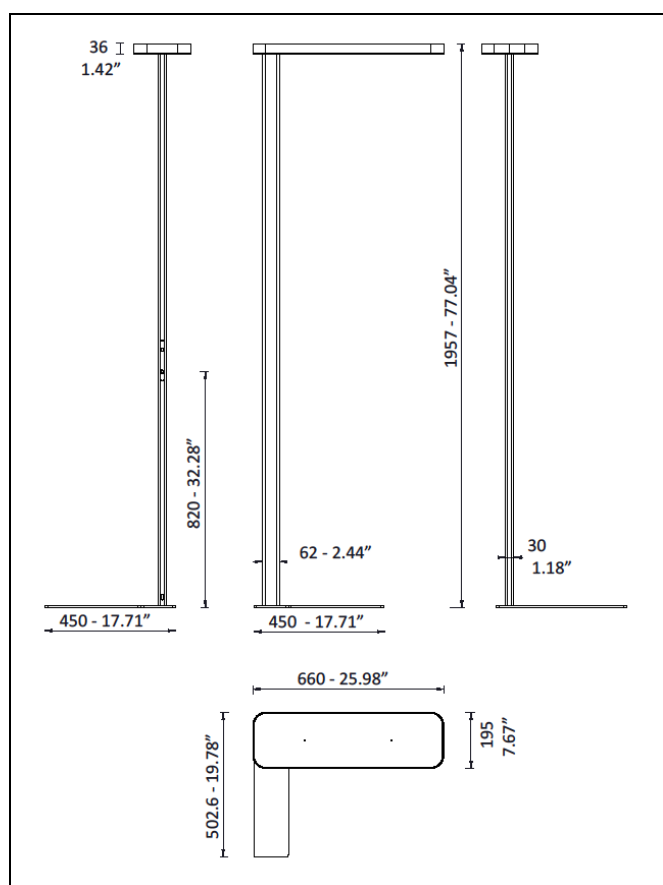

### Light emission

MORE 8 8000lm	MORE 12 12000lm	MORE 16 16000lm
50% DIRECT	33% DIRECT	25% DIRECT
50% INDIRECT	67% INDIRECT	75% INDIRECT

We reserve the right to change details and specifications at any time due to our policy of continuous improvement.